

biber

A backend bibliography processor for biblatex

Philip Kime, François Charette
Philip@kime.org.uk,
firminus@ankabut.net

Version biber 1.0 (biblatex 2.0)
26th April 2012

Contents

1	Important Changes	1	3.3	Logfile	21
2	Introduction	2	3.4	Collation and Localisation	21
2.1	About	2	3.5	Encoding of files	23
2.2	Requirements	3	3.6	Editor Integration	26
2.3	Compatibility Matrix	3	3.7	BIB _{TEX} macros and the MONTH field	27
2.4	License	4	3.8	Biber data source drivers	27
2.5	History	4	3.9	Visualising the Output	28
2.6	Performance	7			
2.7	Acknowledgements	7	4	Binaries	30
3	Use	7	4.1	Binary Caches	30
3.1	Options and config file	8	4.2	Binary Architectures	31
3.2	Input/Output File Locations	20	4.3	Installing	31
			4.4	Building	33

1 Important Changes

Please see the `Changes` file which accompanies Biber for the details on changes in each version. This section is just for important things like incompatible changes which users should be aware of.

0.9.9

The output format option `--graph` has been moved to a new option `--outformat`. The option `--graph` should now be specified as `--outformat=dot` and the `--dot_include` option should be used to specify the elements to include in the DOT output. For example:

```
biber --graph=section,field <file>
```

is now:

```
biber --outformat=dot --dot_include=section,field <file>
```

0.9.8

The `sourcemap` option syntax has changed. The syntax was too confusing. It is now simplified and more powerful. It uses a sequential processing model to apply mappings to an entry. See section 3.1.1.

0.9.7

The user config file has a completely new format. The reason for this is that the older `Config::General` format could not be extended to deal with more sophisticated features like per-datasource restrictions. An XML format is much better and in fact easier to understand. The old format of the `map` option (now called `sourcemap`) was rather confusing because of limitations in the old config file format. Please see section 3.1.1 and convert your config files to the new format.

0.9.6

Matching of citation keys and datasource entry keys is now *case-sensitive*. This is to enforce consistency across the entire Bib_{La}TeX and Biber processing chain. All of the usual referencing mechanisms in _{La}TeX are case-sensitive and so is the matching in Bib_{La}TeX of citations to entries in the `.bbl` file generated by Biber. It is inconsistent and messy to enforce case-insensitivity in only Biber's matching of citations keys to datasource entry keys. If Biber detects what looks like a case mismatch between citation keys, it will warn you.

Summary of warnings/errors is now a new format. When Biber finishes writing the `.bbl`, it gives a summary count of errors/warnings. It used to do this in the same format as BibTeX, for compatibility. Now it uses a more consistent and easier to parse format which matches all other Biber messages. Please note if you need to support Biber in an external tool. I have updated the notes on AUCT_{EX} support below to reflect this.

2 Introduction

2.1 About

Biber is conceptually a BibTeX replacement for Bib_{La}TeX. It is written in Perl with the aim of providing a customised and sophisticated data preparation backend for Bib_{La}TeX. You do *not* need to install Perl to use Biber—binaries are provided for many operating systems via the main TeX distributions (TeXLive, MacTeX, MiKTeX) and also via download from SourceForge. Functionally, Biber offers a superset of BibTeX's capabilities but is tightly coupled with Bib_{La}TeX and cannot be used as a stand-alone tool with standard `.bst` styles. Biber's role is to support Bib_{La}TeX by performing the following tasks:

- Parsing data from data sources
- Processing cross-references, entry sets, related entries

Biber version	B _{IB} L _A T _E X version
0.9.9	1.7x
0.9.8	1.7x
0.9.7	1.7x
0.9.6	1.7x
0.9.5	1.6x
0.9.4	1.5x
0.9.3	1.5x
0.9.2	1.4x
0.9.1	1.4x
0.9	1.4x

Table 1: Biber/B_{IB}L_AT_EX compatibility matrix

- Generating data for name, name list and name/year disambiguation
- Structural validation according to B_{IB}L_AT_EX data model
- Sorting reference lists
- Outputting data to a `.bbl` for B_{IB}L_AT_EX to consume

2.2 Requirements

Biber is distributed primarily as a stand-alone binary and is included in T_EXLive, MacT_EX and MiK_TE_X. If you are using any of these distributions, you do not need any additional software installed to use Biber. You do *not* need a Perl installation at all to use the binary distribution of Biber¹.

Biber’s git repository is on github². Biber’s documentation, binary downloads and supporting files are on SourceForge³ and this is the primary location for development releases, forums and bugfixes etc. Biber is included into T_EXLive, the binaries coming from SourceForge.

2.3 Compatibility Matrix

Biber versions are closed coupled with B_{IB}L_AT_EX versions. You need to have the right combination of the two. Biber will warn you during processing if it encounters information which comes from the wrong B_{IB}L_AT_EX version. Table 1 shows a compatibility matrix for the recent versions.

¹If you prefer, you can run Biber as a normal Perl program and doing this *does* require you to have a Perl interpreter installed. See section 4.

²<https://github.com/plk/biber>

³<http://sourceforge.net/projects/biblatex-biber/>

2.4 License

Biber is released under the free software Artistic License 2.0⁴

2.5 History

B_BT_EX has been the default (only ...) integrated choice for bibliography processing in T_EX for a long time. It has well known limitations which stem from its data format, data model and lack of Unicode support⁵. The `.bst` language for writing bibliography styles is painful to learn and use. It is not a general programming language and this makes it really very hard to do sophisticated automated processing of bibliographies.

B_BL_AT_EX was a major advance for L_AT_EX users as it moved much of the bibliography processing into L_AT_EX macros. However, B_BL_AT_EX still used B_BT_EX as a sorting engine for the bibliography and also to generate various labels for entries. B_BT_EX's capabilities even for this reduced set of tasks was still quite restricted due to the lack of Unicode support and the more and more complex programming issues involved in label preparation and file encoding.

Biber was designed specifically for B_BL_AT_EX in order to provide a powerful backend engine which could deal with any required tasks to do with `.bbl` preparation. Its main features are:

- Deals with the full range of UTF-8
- Sorts in a completely customisable manner using, when available, CLDR collation tailoring
- Allows for per-entrytype options
- Automatically encodes the `.bbl` into any supported encoding format⁶
- Processes all bibliography sections in one pass of the tool
- Output to GraphViz instead of `.bbl` in order to help visualise complex bibliographies with many crossrefs etc. (see section 3.9)
- Handles UTF-8 citekeys and filenames (given a suitable fully UTF-8 compliant T_EX engine)
- Creates entry sets dynamically and allows easily defined static entry sets, all processed in one pass
- 'Syntactic' inheritance via new `@XDATA` entrytype and field. This can be thought of as a field-based generalisation of the B_BT_EX `@STRING` functionality (which is also supported).
- 'Semantic' inheritance via a generalisation of the B_BT_EX crossreference mechanism. This is highly customisable by the user—it is possible to choose which

⁴<http://www.opensource.org/licenses/artistic-license-2.0.php>

⁵In fact, there is now a Unicode version

⁶'Supported' here means encodings supported by the Perl `Encode` module

fields to inherit for which entrytypes and to inherit fields under different names etc. Nested crossreferences are also supported.

- Handles complex auto-expansion and contraction of names and namelists (See section 4.11.4 of the `BibLaTeX` manual for an excellent explanation with examples, this is quite an impressive feature ...)
- Extensible modular data sources architecture for ease of adding more data source types
- Support for remote data sources
- User-definable mapping and suppression of fields and entrytypes in data sources. You can use this to, for example, ignore all `ABSTRACT` fields completely. See section 3.1.1
- Support for related entries, to enable generic treatment of things like ‘translated as’, ‘reprinted as’, ‘reprint of’ etc. (`BibLaTeX` support coming in `BibLaTeX 2.x`)
- Customisable labels (`BibLaTeX` support coming in `BibLaTeX 2.x`)
- Multiple bibliography lists in the same section with different sorting and filtering (`BibLaTeX` support coming in `BibLaTeX 2.x`)
- No more restriction to a static data model of specific fields and entrytypes. (`BibLaTeX` support coming in `BibLaTeX 2.x`)
- Structural validation of the data against the data model with a customisable validation model (`BibLaTeX` support coming in `BibLaTeX 2.x`)

Figure 1 shows the main functional units of processing in Biber. The most difficult tasks which Biber performs are the processing of `BibLaTeX`’s `uniquename` and `uniquelist` options⁷, the sorting of lists⁸ and the initial data parse and remap into an internal data model. Biber is getting on for around 20,000 lines of mostly OO Perl and relies on certain splendid Perl modules such as `Unicode::Collate`, `Text::BibTeX` and `XML::LibXML`.

It may be useful to know something about the different routes a datasource entry can take as it passes through Biber.

1. All cited entries which are subsequently found in a datasource are instantiated in the internal Biber data model.
2. Some uncited entries on which cited entries depend are instantiated in the internal Biber data model:
 - Entries with entrytype `@XDATA` which are referenced from cited entries.
 - Entries mentioned in the `CROSSREF` or `XREF` field of a cited entry (unless they are also cited themselves in which case they are already instantiated as per item 1 above).

⁷A rather tricky unbounded loop but with a guaranteed eventual stable exit state.

⁸This is a complex, arbitrary multi-field Schwartzian Transform which has to deal with potentially different case and order settings for every field.

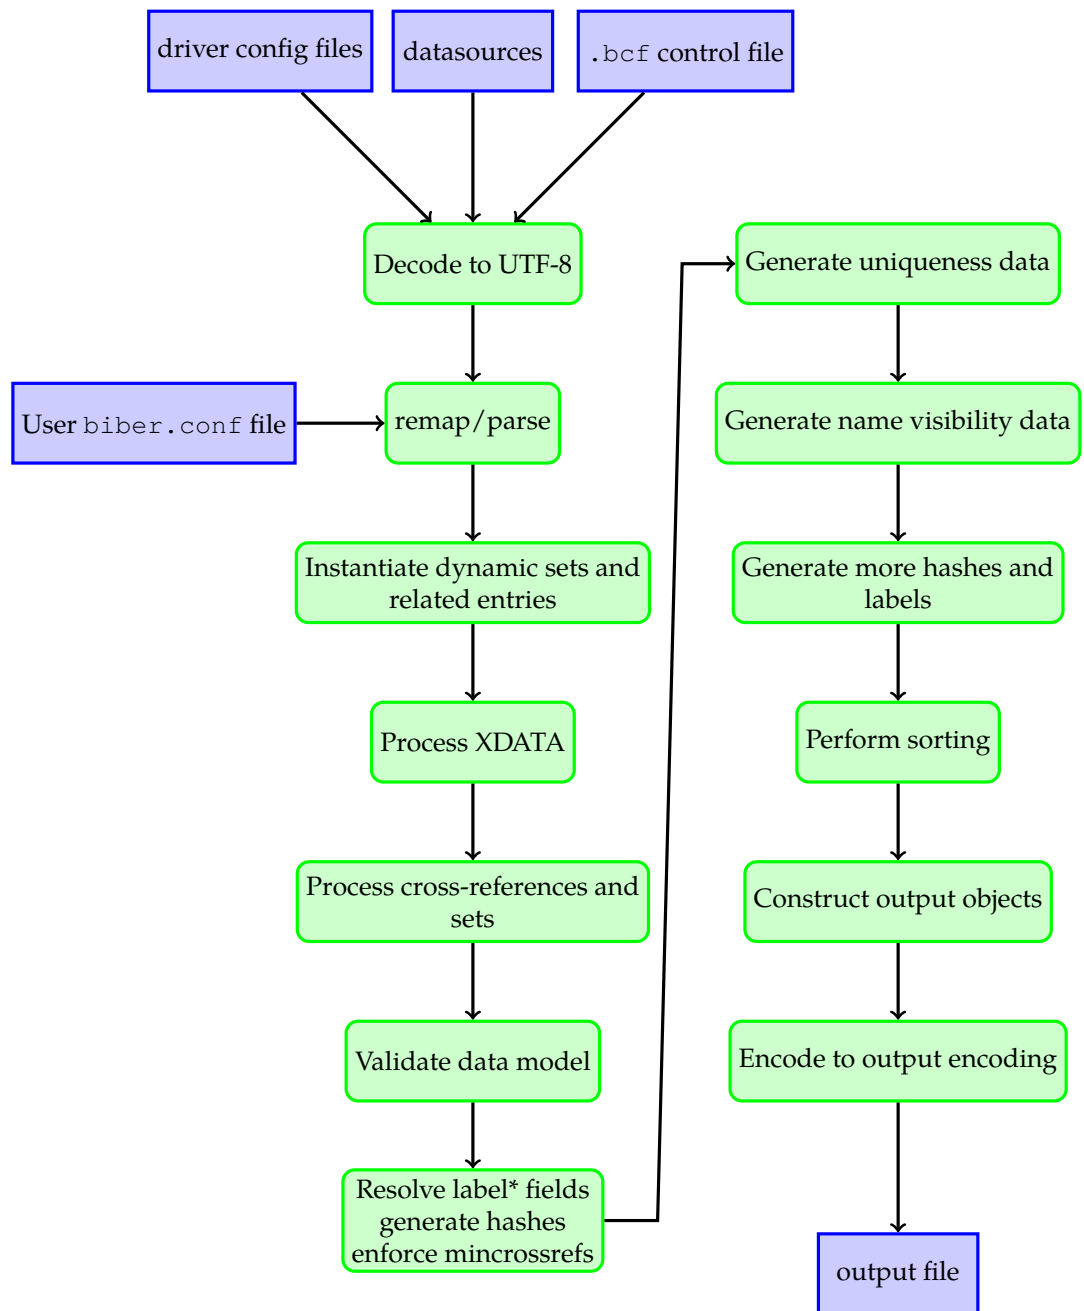


Figure 1: Overview of Biber's main functional units

- Clones of entries mentioned as a ‘related’ entry of a cited entry⁹.
 - Members of sets, either explicit `@SET` entrytype entries or dynamic sets.
3. Some uncited but instantiated entries are promoted to cited status so that they make it into the output:
 - Entries instantiated by being members of a set.
 - Entries instantiated by being mentioned as a `CROSSREF` are promoted to cited status if `CROSSREF`’ed or `XREF`’ed at least `mincrossref` times.
 - Clones of entries mentioned as a ‘related’ entry of a cited entry.
 4. Some of these auto-cited entries have the ‘dataonly’ option set on them so that `BibLaTeX` will only use them for data and will not output them to the bibliography:
 - Clones of entries mentioned as a ‘related’ entry of a cited entry.

2.6 Performance

Biber can’t really be compared with `BibTeX` in any meaningful way performance-wise. Biber is written in Perl and does a *great* deal more than `BibTeX` which is written in C. One of Biber’s test cases is a 2150 entry, 15,000 line `.bib` file which references a 630 entry macros file with a resulting 160 or so page (A4) formatted bibliography. This takes Biber under 3 minutes to process on a reasonable computer. This is perfectly acceptable, especially for a batch program.

2.7 Acknowledgements

François Charette originally wrote a first modest version of Biber. Philip Kime joined in the development in 2009 and is largely responsible for making it what it is today.

3 Use

Firstly, please note that Biber will *not* attempt to sanitise the content of `BibTeX` data sources. That is, don’t expect it to auto-escape any `TeX` special characters like ‘&’ or ‘%’ which it finds in, for example, your `TITLE` fields. It used to do this in earlier versions in some cases but as of version 0.9, it doesn’t because it’s fraught with problems and leads to inconsistent expectations and behaviour between different data source types. In your `BibTeX` data sources, please make sure your entries are legal `TeX` code.

⁹This is done to implement the ‘related’ entry feature which does not currently have a `BibLaTeX` interface.

Running `biber --help` will display all options and a brief description of each. This is the most useful brief source of usage information. Biber returns an exit code of 0 on success or 1 if there was an error.

Most Biber options can be specified in long or short format. When mentioning options below, they are referred to as ‘long form|short form’ when an option has both a long and short form. As usual with such options, when the option requires an argument, the long form is followed by an equals sign ‘=’ and then the argument, the short form is followed by a space and then the argument. For example, the `--configfile|-g` option can be given in two ways:

```
biber --configfile=somefile.conf
biber -g somefile.conf
```

With the `backend=biber` option, `BIBLATEX` switches its backend interface and passes all options and information relevant to Biber’s operation in a control file with extension `.bcf`¹⁰. This is conceptually equivalent to the `.aux` file which `LATEX` uses to pass information to `BIBTEX`. The `.bcf` file is XML and contains many options and settings which configure how Biber is to process the bibliography and generate the `.bbl` file.

The usual way to call Biber is simply with the `.bcf` file as the only argument. `BIBLATEX` always writes the control file with a `.bcf` extension. Specifying the ‘`.bcf`’ extension to Biber is optional. Assuming a control file called `test.bcf`, the following two commands are equivalent:

```
biber test.bcf
biber test
```

3.1 Options and config file

`BIBLATEX` options which Biber needs to know about are passed via the `.bcf` file. See Table 2 for the `BIBLATEX` options which Biber uses and also for the scopes which are supported for each option. Biber also has its own options which are set using the following resource chain, given in decreasing precedence order:

```
command line options →
  biber.conf file →
    .bcf file →
      Biber hard-coded defaults
```

¹⁰`BIBLATEX` Control File

B _I B _L T _E X option	Global	Per-type	Per-entry
alphaothers	✓	✓	
dataonly		✓	✓
inheritance	✓		
labelalpha	✓	✓	
labelalphatemplate	✓	✓	
labelnamespec	✓	✓	
labelnumber	✓	✓	
labeleyear	✓	✓	
labeyearspect	✓	✓	
maxalphanames	✓	✓	✓
maxbibnames	✓	✓	✓
maxcitenames	✓	✓	✓
maxitems	✓	✓	✓
minalphanames	✓	✓	✓
minbibnames	✓	✓	✓
mincitenames	✓	✓	✓
minitems	✓	✓	✓
presort	✓	✓	✓
singletitle	✓	✓	
skipbib		✓	✓
skiplab		✓	✓
skiplos		✓	✓
sortalphaothers	✓	✓	
sortexclusion		✓	
sorting	✓		
structure	✓		
uniquelist	✓	✓	✓
uniquename	✓	✓	✓
useauthor	✓	✓	✓
useeditor	✓	✓	✓
useprefix	✓	✓	✓
usetranslator	✓	✓	✓

Table 2: B_IB_LT_EX options which Biber uses

Users do not need to care directly about the contents or format of the `.bcf` file as this is generated from the options which they specify via `BIBLATEX`. The config file is a place to set commonly used command-line options and also to set options which cannot be set on the command line.

The configuration file is by default called `biber.conf` but this can be changed using the `--configfile|-g` option. Unless `--configfile|-g` is used, the config file is looked for in the following places, in decreasing order of preference:

`biber.conf` in the current directory →

`$HOME/.biber.conf` →

`$XDG_CONFIG_HOME/biber/biber.conf` →

`$HOME/Library/biber/biber.conf` (Mac OSX only)

`$APPDATA/biber.conf` (Windows only) →

the output of `'kpsewhich biber.conf'` (if available on the system)

The config file is XML. Here Below is an example config file which displays the Biber defaults:

```
<?xml version="1.0" encoding="UTF-8"?>
<config>
  <bblencoding>UTF-8</bblencoding>
  <bibencoding>UTF-8</bibencoding>
  <bblsafechars>0</bblsafechars>
  <bblsafecharsset>base</bblsafecharsset>
  <bltxml>0</bltxml>
  <collate>1</collate>
  <collate_options>
    <option name="level" value="4"/>
  </collate_options>
  <debug>0</debug>
  <decodecharsset>base</decodecharsset>
  <fastsort>0</fastsort>
  <graph>0</graph>
  <mincrossrefs>0</mincrossrefs>
  <nodieonerror>0</nodieonerror>
  <nolog>0</nolog>
  <nostdmacros>0</nostdmacros>
  <nosort>
    <!-- strip prefixes like 'al-' when sorting name fields -->
    <option name="type_names" value="\A\p{L}{2}\p{Pd}"/>
    <!-- strip diacritics when sorting name fields -->
    <option name="type_names" value="[\x{2bf}\x{2018}]/>
  </nosort>
  <onlylog>0</onlylog>
```

```

<quiet>0</quiet>
<sortcase>true</sortcase>
<sortlocale>en_US.utf8</sortlocale>
<sortupper>true</sortupper>
<trace>0</trace>
<validate_config>0</validate_config>
<validate_control>0</validate_control>
<validate_structure>0</validate_structure>
<wraplines>0</wraplines>
</config>

```

In practice, the most commonly used options will be set via `BIBLATEX` macros in your document and automatically passed to Biber via the `.bcf` file. Certain options apply only to Biber and can only be set in the config file, particularly the more complex options. Most options are simple tags. Exceptions are the `nosort` and `collate_options` options which are slightly more complex and can have sub-options as shown. A much more complex option is the `sourcemap` option which is not set by default and which is described in section 3.1.1.

3.1.1 The `sourcemap` option

The supplied data source drivers implement a default mapping from data source entrytypes and fields into the `BIBLATEX` data model¹¹. If you want to override or augment the driver mappings you can use the `sourcemap` option which makes it possible to, for example, have a data source with non-standard entrytypes or fields and to have these automatically mapped into other entrytypes/fields without modifying your data source. Essentially, this alters the source data stream which Biber uses to build the internal `BIBLATEX` data model and is an automatic way of editing the datasource as it is read by Biber.

Figure 2 is a graphical overview of the data flow for data model information. In `BIBLATEX 2.x`, the greyed static `BIBLATEX` data model will be replaced by a dynamic data model read from the `.bcf` control file. See Figure 1 for a more complete overview of Biber’s processing steps.

The `sourcemap` option can only be set in the config file and not on the command line as it has a complex structure. This option allows you to perform various data source mapping tasks which can be useful for pre-processing data which you do not generate yourself:

- Map data source entrytypes to different entrytypes.
- Map datasource fields to different fields.
- Add new fields to an entry

¹¹The `BIBLATEX` data model is currently static and defined in the `BIBLATEX` manual. In the future (`BIBLATEX 2.x`), the data model will be dynamically defined by the user.

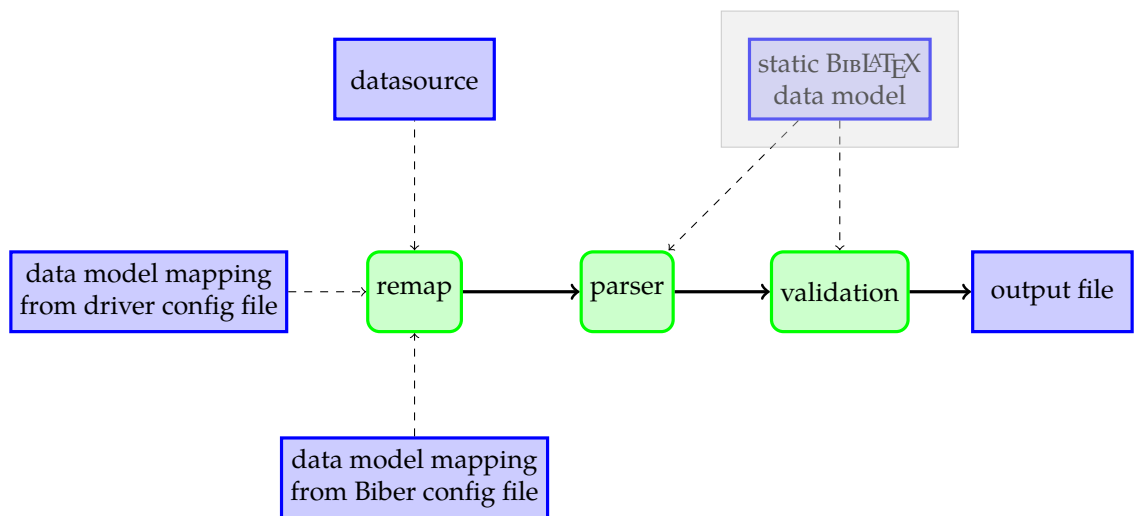


Figure 2: Model data flow in Biber

- Remove fields from an entry
- Modify the contents of a field using standard Perl regular expression match and replace.
- Restrict any of the above operations to entries coming from particular data-sources which you defined in `\addresource{ }` macros.
- Restrict any of the above operations to entries only of a certain entrytype.

There is in fact, more flexibility than the above suggests, examples will show this below. The format of the `sourcemap` option section in the config file is described below, followed by examples which will make things clearer. Items in **red** are not literal, they are descriptive meta-values which are explained in the accompanying text. Items in **blue** are optional within their parent section. The general structure is:

```

<sourcemap>
  <maps datatype="driver1" map_overwrite="1|0">
    <map1 map_overwrite="1|0"> ... </map1>
    ⋮
    <mapn map_overwrite="1|0"> ... </mapn>
  </maps>
  ⋮
  <maps datatype="drivern" map_overwrite="1|0">
    <map1 map_overwrite="1|0"> ... </map1>
    ⋮
    <mapn map_overwrite="1|0"> ... </mapn>
  </maps>
</sourcemap>
  
```

Here, `driver1...drivern` are the names of valid Biber data source drivers (see section 3.8). One thing to note here is the `map_overwrite` attribute. This boolean attribute determines whether, for this driver mapping section, you may overwrite existing fields when adding new fields or mapping them. This attribute can be overridden on a per-map basis, see below. A warning will be issued either way saying whether an existing field will or will not be overwritten. If omitted, it defaults to '0'.

The `map` elements are processed in sequence and contain a number of `map_steps` which are also processed in sequence. Each `map_step` allows you to do a particular thing or combination of things:

- Change the entrytype of an entry
- Change the name of a field
- Add extra fields the entry
- Change the contents of a field

These facilities are explained in more detail below, with examples. A `map` element looks like this:

```
<map map_overwrite="0|1">
  <per_datasource>datasource</per_datasource>
  <per_type>entrytype</per_type>
  <map_step map_type_source="source-entrytype"
    map_field_source="source-field"
    map_type_target="target-entrytype"
    map_field_target="target-field"
    map_match="match-regex"
    map_replace="replace-regex"
    map_field_set="set-field"
    map_field_value="set-value"
    map_null="1"
    map_origfield="1"
    map_origfieldval="1"
    map_origentrytype="1"
    map_final="1"/>
</map>
```

- If there are any `datasources` named in `per_datasource` elements, this mapping only applies to entries coming from the named `datasources`. There can be multiple `per_datasource` elements each specifying one of the data-source names given in a `BibLaTeX \addbibresource` macro.
- If there are any `entrytypes` named in `per_type` elements, this mapping only applies to entries of the named `entrytypes`.

- The `map_overwrite` attribute can be used to override the value for this attribute set on the parent `maps` element. If omitted, it defaults to the parent `maps` attribute value.

Each `map_step` is looked at in turn and compared with the `datasource` entry being processed. A `map_step` works like this:

- Change the `source-entrytype` to `target-entrytype`, if defined. If `map_final` is set then if the entrytype of the entry is not `source-entrytype`, processing of this map immediately terminates.
- Change the `source-field` to `target-field`, if defined. If `map_final` is set, then if there is no `source-field` field in the entry, processing of this map immediately terminates.
- If `map_match` is defined but `map_replace` is not, only apply the step if the `source-field` matches `map_match`.
- Perform a Perl regular expression match and replace on the value of `source-field` if `map_match` and `map_replace` are defined. You may use (and almost certainly will want to use) parentheses for back-references in `map_replace`. Do not quote the regular expressions in any special (i.e. non-Perl) way—it's not necessary.
- If `map_field_set` is defined, then one and only one of the following attributes is then mandatory:
 - `map_field_value` — The `set-field` is set to `set-value`
 - `map_null` — The field is ignored, as if it did not exist in the `datasource`
 - `map_origentrytype` — The `set-field` is set to the most recently mentioned `source-entrytype` name.
 - `map_origfield` — The `set-field` is set to the most recently mentioned `source-field` name
 - `map_origfieldval` — The `set-field` is set to the most recently mentioned `source-field` value

Note that for XML `datasources` (Endnote, Zotero RDF/XML etc.), the names of fields and entrytypes are matched in a case sensitive manner. For all other `datasource` types (BIBTEX, RIS etc.) entrytype and field name matching is case insensitive.

Here are some examples:

```
<map>
  <per_datasource>example1.bib</per_datasource>
  <per_datasource>example2.bib</per_datasource>
  <map_step map_field_set="KEYWORDS" map_field_value="keyw1, keyw2"/>
</map>
```

This would add a KEYWORDS field with value 'keyw1, keyw2' to all entries which are found in either the examples1.bib or examples2.bib files. This assumes that the BibLaTeX source contains \addresource{example1.bib} and \addresource{example2.bib}.

```
<map map_overwrite="0">
  <map_step map_field_source="TITLE"/>
  <map_step map_field_set="NOTE" map_origfieldval="1"/>
</map>
```

Copy the TITLE field to the NOTE field unless the NOTE field already exists.

```
<map map_overwrite="0">
  <map_step map_type_source="CHAT" map_type_target="CUSTOMA" map_final="1"/>
  <map_step map_field_set="TYPE" map_origentrytype="1"/>
</map>
```

Any @CHAT entrytypes would become @CUSTOMA entrytypes and would automatically have a TYPE field set to 'CHAT' unless the TYPE field already exists in the entry (because map_overwrite is false). This mapping applies only to entries of type @CHAT since the first step has map_final set and so if the map_type_source does not match the entry, processing of this map immediately terminates.

```
<map>
  <per_datasource>examples.bib</per_datasource>
  <per_type>ARTICLE</per_type>
  <per_type>BOOK</per_type>
  <map_step map_field_set="ABSTRACT" map_null="1"/>
  <map_step map_field_set="NOTE" map_field_value="Auto-created this field"/>
</map>
```

Any entries of entrytype ARTICLE or BOOK from the 'examples.bib' datasource would have their ABSTRACT fields removed and a NOTE field added with value 'Auto-created this field'.

```
<map>
  <map_step map_field_set="ABSTRACT" map_null="1"/>
  <map_step map_field_source="CONDUCTOR" map_field_target="NAMEA"/>
  <map_step map_field_source="GPS" map_field_target="USERA"/>
</map>
```

This removes ABSTRACT fields from any entry, changes CONDUCTOR fields to NAMEA fields and changes GPS fields to USERA fields

```
<map>
  <map_step map_field_source="PUBMEDID"
```

```

        map_field_target="EPRINT"
        map_final="1"/>
    <map_step map_field_set="EPRINTTYPE" map_origfield="1"/>
    <map_step map_field_set="USERD"
        map_field_value="Some string of things"/>
</map>

```

Applies only to entries with PUBMED fields and maps PUBMEDID fields to EPRINT fields, sets the EPRINTTYPE field to 'PUBMEDID' and also sets the USERD field to the string 'Some string of things'.

```

<map>
  <map_step map_field_source="SERIES"
    map_match="\A\d*(.+)"
    map_replace="\L$1"/>
</map>

```

Here, the contents of the SERIES field have leading numbers stripped and the remainder of the contents lowercased.

```

<map>
  <map_step map_field_source="TITLE"
    map_match="Collected\s+Works.+Freud"
    map_final="1"/>
  <map_step map_field_set="KEYWORDS" map_field_value="freud"/>
</map>

```

Here, if for an entry, the TITLE field matches a particular regular expression, we set a special keyword so we can, for example, make a references section just for certain items.

```

<map>
  <map_step map_field_source="LISTA" map_match="regexp" map_final="1"/>
  <map_step map_field_set="LISTA" map_null="1"/>
</map>

```

If an entry has a LISTA field which matches regular expression 'regexp', then it is removed.

```

<map>
  <map_step map_field_source="AUTHOR"
    map_match="Smith, Bill" map_replace="Smith, William"/>
  <map_step map_field_source="AUTHOR"
    map_match="Jones, Baz" map_replace="Jones, Barry"/>
</map>

```


Here, we use multiple match/replace for the same field to regularise some inconstant name variants. Bear in mind that match/replace processing within a `map` element is sequential and the changes from a previous match/replace are already committed.

```
<map map_overwrite="1">
  <map_step map_field_source="AUTHOR" map_match="Doe, " map_final="1"/>
  <map_step map_field_set="SHORTAUTHOR" map_origfieldval="1"/>
  <map_step map_field_set="SORTNAME" map_origfieldval="1"/>
  <map_step map_field_source="SHORTAUTHOR"
    map_match="Doe, \s*J(?:\.|ohn) (?:[-]*) (?:P\.|Paul) *"
    map_replace="Doe, John Paul"/>
  <map_step map_field_source="SORTNAME"
    map_match="Doe, \s*J(?:\.|ohn) (?:[-]*) (?:P\.|Paul) *"
    map_replace="Doe, John Paul"/>
</map>
```

Only applies to entries with an `AUTHOR` field matching 'Doe, '. First the `AUTHOR` field is copied to both the `SHORTAUTHOR` and `SORTNAME` fields, overwriting them if they already exist. Then, these two new fields are modified to canonicalise a particular name, which presumably has some variants in the datasource.

Other datasource types

For data sources other than `BibTeX`, (e.g. `ris`, `endnotexml` and `zoterordfxml`), the source entrytypes and fields are usually very differently modelled and named. For example, here is how to drop `dc:subject` fields from various entrytypes in Zotero XML RDF format data sources:

```
<maps datatype="zoterordfxml" map_overwrite="1">
  <map>
    <per_type>journalArticle</per_type>
    <per_type>book</per_type>
    <per_type>bookSection</per_type>
    <map_step map_field_set="dc:subject" map_null="1"/>
  </map>
</maps>
```

Or here, mapping journal articles into `@Report` entries for Endnote XML format data sources within a particular data source.

```
<maps datatype="endnotexml" map_overwrite="1">
  <map>
    <per_datasource>endnote.xml</per_datasource>
    <map_step map_type_source="Journal Article" map_type_target="Report"/>
  </map>
</maps>
```

Or here, dropping the N2 field from RIS datasources, which are commonly used for abstracts:

```
<maps datatype="ris" map_overwrite="1">
  <map>
    <map_step map_field_set="N2" map_null="1"/>
  </map>
</maps>
```

3.1.2 The `nosort` option

The value of the `nosort` option can only be set in the config file and not on the command line. This is because the values are Perl regular expressions and would need special quoting to set on the command line. This can get a bit tricky on some OSes (like Windows) so it's safer to set them in the config file. In any case, it's unlikely you would want to set them for particular Biber runs; they would more likely be set as your personal default and thus they would naturally be set in the config file anyway. `nosort` allows you to ignore parts of a field for sorting. This is done using Perl regular expressions which specify what to ignore in a field. You can specify as many patterns as you like for a specific field. Also available are some field type aliases so you can, for example, specify patterns for all name fields or all title fields. These field types all begin with the string `'type_'`, see Table 3.

For example, this option can be used to ignore diacritic marks and prefixes in names which should not be considered when sorting. Given (the default):

```
<nosort>
  <!-- strip prefixes like 'al-' when sorting names -->
  <option name="type_names" value="\A\p{L}{2}\p{Pd}"/>
  <!-- strip diacritics when sorting names -->
  <option name="type_names" value="[\x{2bf}\x{2018}]/>
</nosort>
```

and the Bib_T_EX data source entry:

```
AUTHOR = {{al-Hasan}, °Alī},
```

the prefix `'al-'` and the diacritic `'°'` will not be considered when sorting. See the Perl regular expression manual page for details of the regular expression syntax¹².

You may specify any number of `option` elements. If a `nosort` option is found for a specific field, it will override any option for a type which also covers that field.

Here is another example. Suppose you wanted to ignore `'The'` at the beginning of a `TITLE` field when sorting, you could add this to your `biber.conf`:

¹²<http://perldoc.perl.org/perlre.html>

Alias	Fields
type_name	author afterword annotator bookauthor commentator editor editora editorb editorc foreword holder introduction namea nameb namec shortauthor shorteditor translator
type_title	booktitle eventtitle issuetitle journaltitle maintitle origtitle title

Table 3: `nosort` option field type aliases

```
<nosort>
  <option name="title" value="\AThe\s+"/>
</nosort>
```

If you wanted to do this for all title fields listed in Table 3, then you would do this:

```
<nosort>
  <option name="type_title" value="\AThe\s+"/>
</nosort>
```

Note: `nosort` can be specified for most fields but not for things like dates and special fields as that wouldn't make much sense.

3.1.3 The `collate_options` option

The `collate_options` option has format similar to `nosort`. See Section 3.4 for details about the option, here is an example of a config file setting:

```
<collate_options>
  <option name="level" value="3"/>
  <option name="table" value="/home/user/data/otherkeys.txt"/>
</collate_options>
```

3.2 Input/Output File Locations

3.2.1 Control file

The control file is normally passed as the only argument to Biber. It is searched for in the following locations, in decreasing order of priority:

```
Absolute filename →
  In the --output_directory, if specified →
    Relative to current directory →
      Using kpsewhich, if available
```

3.2.2 Data sources

Local data sources of type 'file' are searched for in the following locations, in decreasing order of priority:

Absolute filename →

In the `--output_directory`, if specified →

Relative to current directory →

In the same directory as the control file →

Using `kpsewhich` for supported formats, if available

Remote file data sources (beginning with `http://` or `ftp://`) are retrieved to a temp file and processed as normal. Users do not specify explicitly the bibliography database files; they are passed in the `.bcf` control file, which is constructed from the `BibLaTeX` `\addbibresource{}` macros.

3.3 Logfile

By default, the logfile for Biber will be named `\jobname.blg`, so, if you run

```
biber <options> test.bcf
```

then the logfile will be called `'test.blg'`. Like the `.bbl` output file, it will be created in the `--output_directory|-c`, if this option is defined. You can override the logfile name by using the `--logfile` option:

```
biber --logfile=lfname test.bcf
```

results in a logfile called `'lfname.blg'`.

Warning: be careful if you are expecting Biber to write to directories which you don't have appropriate permissions to. This is more commonly an issue on non-Windows OSes. For example, if you rely on `kpsewhich` to find your database files which are in system `TeX` directories, you may well not have write permission there so Biber will not be able to write the `.bbl`. Use the `--outfile|-O` option to specify the location to write the `.bbl` to in such cases.

3.4 Collation and Localisation

Biber takes care of collating the bibliography for `BibLaTeX`. It writes entries to the `.bbl` file sorted by a completely customisable set of rules which are passed in the `.bcf` file by `BibLaTeX`. Biber has two ways of performing collation:

`--collate|-C`

The default. This option makes Biber use the Perl `Unicode::Collate` module for collation which implements the full UCA (Unicode Collation Algorithm). It also has CLDR (Common Locale Data Repository) tailoring to deal with cases which are not

covered by the UCA. It is a little slower than `--fastsort|-f` but the advantages are such that it's rarely worth using `--fastsort|-f`

`--fastsort|-f`

Biber will sort using the OS locale collation tables. The drawback for this method is that special collation tailoring for various languages are not implemented in the collation tables for many OSes. For example, few OSes correctly sort 'å' before 'ä' in the Swedish (`sv_SE`) locale. If you are using a common latin alphabet, then this is probably not a problem for you.

The locale used for collation is determined by the following resource chain which is given in decreasing precedence order:

```
--collate_options|-c (e.g. -c 'locale => "de_DE"') →  
--sortlocale|-l →  
LC_COLLATE environment variable →  
LANG environment variable →  
LC_ALL environment variable
```

With the default `--collate|-C` option, the locale will be used to look for a collation tailoring for that locale. It will generate an informational warning if it finds none. This is not a problem as the vast majority of collation cases are covered by the standard UCA and many locales neither have nor need any special collation tailoring.

With the `--fastsort|-f` option, the locale will be used to locate an OS locale definition to use for the collation. This may or may not be correctly tailored, depending on the locale and the OS.

Collation is by default case sensitive. You can turn this off globally using the Biber option `--sortcase=false` or from `BibLaTeX` using its option `sortcase=false`. The option can also be defined per-field so you can sort some fields case sensitively and others case insensitively. See the `BibLaTeX` manual.

`--collate|-C` by default collates uppercase before lower. You can reverse this globally for all sorting using the Biber option `--sortupper=false` or from `BibLaTeX` by using its option `sortupper=false`. The option can also be defined per-field so you can sort some fields uppercase before lower and others lower before upper. See the `BibLaTeX` manual. Be aware though that some locales rightly enforce a particular setting for this (for example, Danish). You will be able to override it but Biber will warn you if you do. `sortupper` has no effect when using `--fastsort|-f`—you are at the mercy of what your OS locale does.

There are in fact many options to `Unicode::Collate` which can tailor the collation in various ways in addition to the locale tailoring which is automatically performed. Users should see the the documentation to the module for the various options, most of which the vast majority of users will never need¹³. Options are passed using the `--collate_options|-c` option as a single quoted string, each option separated by comma, each key and value separated by `'=>'`. See examples.

3.4.1 Examples

```
biber
    Call Biber using all settings from the .bcf generated from the LATEX run. Case sensitive UCA sorting is performed taking the locale for tailoring from the environment if no sortlocale is defined in the .bcf
biber --sortlocale=de_DE
    Override any locale setting in the .bcf or the environment.
biber --fastsort
    Use slightly quicker internal sorting routine. This uses the OS locale files which may or may not be accurate.
biber --sortcase=false
    Case insensitive sorting.
biber --sortupper=false --collate_options="backwards => 2"
    Collate lowercase before upper and collate French accents in reverse order at UCA level 2.
```

3.5 Encoding of files

Biber takes care of re-encoding the data source data as necessary. In normal use, BibL^AT_EX passes its `bibencoding` option value to Biber via the `.bcf` file. It also passes the value of its `texencoding` option (which maps to Biber's `--bblencoding|-E` option) the default value of which depends on which T_EX engine and encoding packages you are using (see BibL^AT_EX manual for details).

Biber performs the following tasks:

1. Decodes the data source into UTF-8 if it is not UTF-8 already
2. Decodes L^AT_EX character macros into UTF-8 if `--bblencoding|-E` is UTF-8
3. Encodes the output so that the `.bbl` is in the encoding that `--bblencoding|-E` specifies
4. Warns if it is asked to output to the `.bbl` any UTF-8 decoded L^AT_EX character macros which are not in the `--bblencoding|-E` encoding. Replaces with a suitable L^AT_EX macro

¹³For details on the various options, see <http://search.cpan.org/search?query=Unicode%3A%3ACollate&mode=all>

Normally, you do not need to set the encoding options on the Biber command line as they are passed in the `.bcf` via the information in your `BibLaTeX` environment. However, you can override the `.bcf` settings with the command line. The resource chain for encoding settings is, in decreasing order of preference:

```
--bibencoding|-e and --bblencoding|-E →  
  Biber config file →  
    .bcf control file
```

3.5.1 `LaTeX` macro decoding

As mentioned above, Biber sometimes converts `LaTeX` character macros into UTF-8. In fact there are two situations in which this occurs.

1. When `--bblencoding|-E` is UTF-8
2. Always for internal sorting purposes

This decoding is very useful but take note of the following two scenarios, which relate to each of the two situations in which `LaTeX` macro decoding occurs:

Decoding when output is UTF-8

If you are using `PDFLaTeX` and `\usepackage[utf8]{inputenc}`, it is possible that the UTF-8 characters resulting from Biber's internal `LaTeX` character macro decoding break `inputenc`. This is because `inputenc` does not implement all of UTF-8, only a commonly used subset.

An example—if you had `\DJ` in your `.bib` data source, Biber decodes this correctly to ‘D’ and this breaks `inputenc` because it doesn't understand that UTF-8 character. The real solution here is to switch to a `TeX` engine with full UTF-8 support like `XYTeX` or `LuaTeX` as these don't use or need `inputenc`. However, you can also try the `--bblsafechars` option which will try to convert any UTF-8 chars into `LaTeX` macros on output. For information on the `--bblsafechars` option, see section [3.5.2](#).

Decoding for internal sorting

If your `bblencoding` is not UTF-8, and you are using some UTF-8 equivalent `LaTeX` character macros in your `.bib` data source, then some `.bbl` fields (currently only `\sortinit{}`) might end up with invalid characters in them, according to the `.bbl` encoding. This is because some fields must be generated from the final sorting data which is only available after the `LaTeX` character macro decoding step.

For example, suppose you are using `PDFLaTeX` with `\usepackage[latin1]{inputenc}` and the following `BibTeX` data source entry:


```
@BOOK{citekey1,
  AUTHOR = {{\v S}imple, Simon},
}
```

With normal L^AT_EX character macro decoding, the `{\v S}` is decoded into ‘Š’ and so with name-first sorting, `\sortinit{}` would be ‘Š’. This is an invalid character in latin1 encoding and so the `.bbl` would be broken. In such cases when `\sortinit{}` is a char not valid in the `bbencoding`, Biber tries to replace the character with a suitable L^AT_EX macro. The solution is really to use UTF-8 `.bbl` encoding whenever possible. In extreme cases where even with UTF-8 encoding, the char is not recognised by L^AT_EX due to an incomplete UTF-8 implementation (as with `inputenc`), this might also mean switching T_EX engines to one that supports full UTF-8 (like XeT_EX or LuaT_EX).

3.5.2 L^AT_EX macro encoding

The opposite of decoding; converting UTF-8 characters into L^AT_EX macros. You can force this with the `--bblsafechars` option which will do a generally good job of making your `.bbl` plain ASCII. It can be useful in certain edge cases where your bibliography introduces characters which can’t be handled by your main document. See section 3.5.1 above for an example such case.

A common use case for L^AT_EX macro encoding is when the bibliography data source is not ASCII but the `.tex` file is and so this case is automated for you: if the BibL^AT_EX option ‘`texencoding`’ (which corresponds to the Biber option ‘`--bbencoding|-E`’) is set to an ASCII encoding (‘`ascii`’ or ‘`x-ascii`’) and ‘`--bibencoding|-e`’ is not ASCII, Biber will automatically set `--bblsafechars`.

See also the `biber --help` output for the `--bblsafecharsset` and `--decodecharsset` options which can customise the set of conversion rules to use. The characters and macros which Biber maps during encoding and decoding are documented¹⁴.

3.5.3 Examples

```
biber
  Set bibencoding and bbencoding from the config file or .bcf
biber --bbencoding=latin2
  Encode the .bbl as latin2, overriding the .bcf
biber --bblsafechars
  Set bibencoding and bbencoding from the config file or .bcf. Force encoding
  of UTF-8 chars to LATEX macros using default conversion set
```

¹⁴<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/1.0/documentation/utf8-macro-map.html>

```

biber --bblencoding=ascii
    Encode the .bbl as ascii, overriding the .bcf. Automatically sets --bblsafechars
    to force UTF-8 to LATEX macro conversion
biber --bblencoding=ascii --bblsafecharsset=full
    Encode the .bbl as ascii, overriding the .bcf. Automatically sets --bblsafechars
    to force UTF-8 to LATEX macro conversion using the full set of conversions
biber --decodecharsset=full
    Set bibencoding and bblencoding from the config file or .bcf. Use the full
    LATEX macro to UTF-8 conversion set because you have some more obscure character
    macros in your .bib data source which you want to sort correctly
biber -u
    Shortcut alias for biber --bibencoding=UTF-8
biber -U
    Shortcut alias for biber --bblencoding=UTF-8

```

3.6 Editor Integration

Here is some information on how to integrate Biber into some of the more common editors

3.6.1 Emacs

Emacs has the powerful AUCT_EX mode for editing T_EX and running compilations. Updated files for AUCT_EX 11.86 are available here:

<http://sourceforge.net/projects/biblatex-biber/files/auctex-biber.zip>

Drop the .el files in the .zip file over the ones in your AUCT_EX installation tree, delete the corresponding .elc files and run `M-0 M-x byte-recompile-directory` and give the path of your AUCT_EX main install directory where the new files reside. Hopefully these modifications will make it into the official AUCT_EX distributions soon.

The additions augment AUCT_EX in the following ways:

- Adds font-lock support for most B_IB_LA_TE_X macros
- Auto-detects whether you are using Biber with B_IB_LA_TE_X
- Can detect whether dependencies like data sources have changed without them being open in Emacs
- Understands B_IB_LA_TE_X and Biber messages so that AUCT_EX will prompt you with the best default command to run next when using `C-cC-c`

3.6.2 T_EXworks

It's very easy to add Biber support to T_EXworks. In the Preferences, select the Type-setting tab and then add a new Processing Tool as in Figure 3.

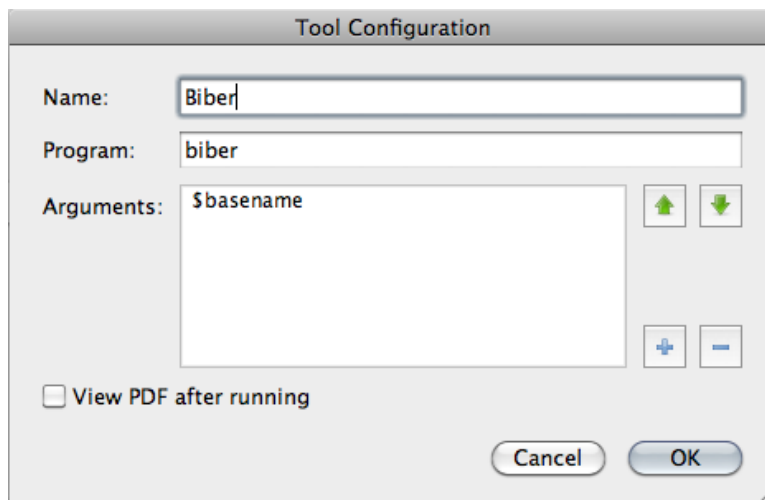


Figure 3: Screenshot of T_EXworks processing tool setup for Biber

3.7 B_IB_T_EX macros and the MONTH field

B_IB_T_EX defines macros for month abbreviations like ‘jan’, ‘feb’ etc. Biber also does this, defining them as numbers since that is what B_IB_L_AT_EX wants. In case you are also defining these yourself (although if you are only using B_IB_L_AT_EX, there isn't much point), you will get macro redefinition warnings from the `btparse` library. You can turn off Biber's macro definitions to avoid this by using the option `--nostdmacros`.

Biber will look at any MONTH field in a B_IB_T_EX data source and if it's not a number as B_IB_L_AT_EX expects (because it wasn't one of the macros as mentioned above or these macros were disabled by `--nostdmacros`), it will try to turn it into the right number in the `.bbl`. If you only use B_IB_L_AT_EX with your B_IB_T_EX data source files, you should probably make any MONTH fields be the numbers which B_IB_L_AT_EX expects.

3.8 Biber data source drivers

Biber uses a modular data source driver model to provide access to supported data sources. The drivers are responsible for mapping driver entry types and fields to the B_IB_L_AT_EX model. This is aided by a driver configuration file (`.dcf`). The information

in this file for each driver can be found in the driver documentation folder on SourceForge¹⁵. This file shows you which handlers the driver uses for different fields and what certain entry types and fields are aliased to in the Bib_LTeX data model. This is not fantastically useful to know without knowing also what the named driver handlers do specifically but there is a ‘description’ section which mentions any special handling and general comments on the driver. You should read the documentation for the drivers you use to get an idea of how Biber handles your data. Data model mapping is an imprecise art and the drivers are where the necessarily messy parts of Biber live. Most data source models are not designed with typesetting in mind and are usually not fine-grained enough to provide the sorts of information that Bib_LTeX needs. Biber does its best to obtain as much meaningful information from a data source as possible. Currently supported data sources drivers are:

- Bib_LTeX — Bib_LTeX data files
- endnotexml — Endnote XML export format, version ≥ Endnote X1
- ris — Research Information Systems format
- zoterordfxml — Zotero RDF XML format, version 2.0.9

3.9 Visualising the Output

The option `--outformat=dot` will cause Biber to write a GraphViz¹⁶ `.dot` file instead of a `.bbl`. This file graphs the bibliographic data as it exists after all processing. You can transform this file using the `dot` program from GraphViz to generate a high quality graphical representation of the data in a format of your choice. A good output format choice with `dot` is SVG¹⁷ which can be viewed in any modern web browser. This format has the advantage of tooltips and Biber uses these to give you more information on connections between entries: hover the cursor on an arrow in the output and it will tell you what it means. To output in SVG, use this command after installing GraphViz:

```
dot -Tsvg <file>.dot -o <file>.svg
```

The `--dot_include` option takes a comma delimited string as argument. The elements of this string define the information to include in the `.dot` output graph. The valid sub-options are shown in Table 4. If the `--dot_include` option is not given then the default setting is implicitly used, which is:

```
--dot_include=crossref, section, xdata, xref
```

¹⁵<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/1.0/documentation/drivers>

¹⁶<http://www.graphviz.org>

¹⁷Scalable Vector Graphics

Sub-option	Description
crossref	Show crossreference relationships
field	Show fields within entries
related	Show related entries and clones
section	Show sections
xdata	Show XDATA relationships
xref	Show XREF relationships

Table 4: Valid sub-options for the `graph` option

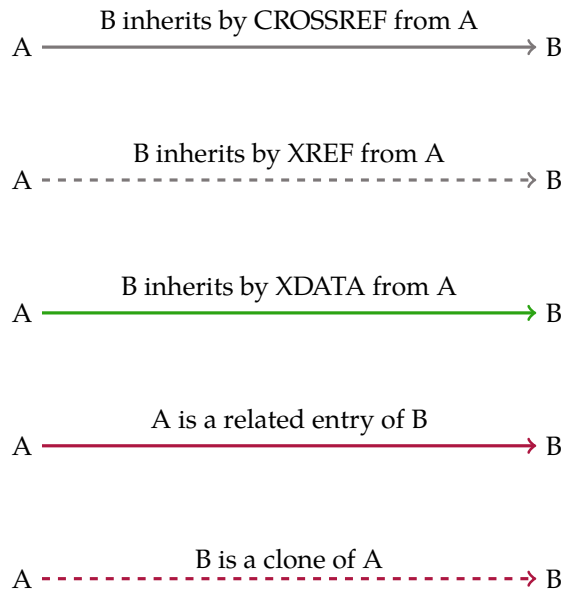
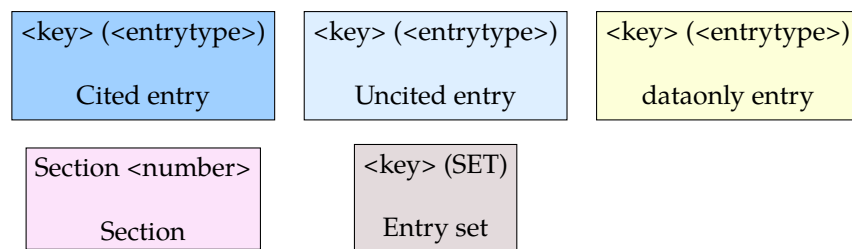


Figure 4: Key to `.dot` output format

4 Binaries

Biber is a Perl application which relies heavily on quite a few modules. It is packaged as a stand-alone binary using the excellent `PAR::Packer` module which can pack an entire Perl tree plus dependencies into one file which acts as a stand-alone binary and is indistinguishable from such to the end user. You can also simply download the Perl source and run it as a normal Perl program which requires you to have a working Perl 5.14+ installation and the ability to install the pre-requisite modules. You would typically only do this if you wanted to keep up with all the bleeding-edge git commits before they had been packaged as a binary. Almost all users will not want to do this and should use the binaries from their \TeX distribution or downloaded directly from SourceForge in case they need to use a more recent binary than is included in their \TeX distribution.

The binary distributions of Biber are made using the Perl `PAR::Packer` module. They can be used as a normal binary but have some behaviour which is worth noting:

- Don't be worried by the size of the binaries. `PAR::Packer` essentially constructs a self-extracting archive which unpacks the needed files first.
- On the first run of a new version (that is, with a specific hash), they actually unpack themselves to a temporary location which varies by operating system. This unpacking can take a little while and only happens on the first run of a new version. **Please don't kill the process if it seems to take some time to do anything on the first run of a new binary.** If you do, it will not unpack everything and it will almost certainly break Biber. You will then have to delete your binary cache (see section 4.1 below) and re-run the Biber executable again for the first time to allow it to unpack properly.

4.1 Binary Caches

`PAR::Packer` works by unpacking the required files to a cache location. It only does this on the first run of a binary by computing a hash of the binary and comparing it with the cache directory name which contains the hash. So, if you run several versions of a binary, you will end up with several cached trees which are never used. This is particularly true if you are regularly testing new versions of the Biber binary. It is a good idea to delete the caches for older binaries as they are not needed and can take up a fair bit of space. The caches are located in a temporary location which varies from OS to OS. The cache name is:

```
par-<hex_encoded_username>/cache-<hash> (Linux/Unix/OSX)
par-<hex_encoded_username>\cache-<hash> (Windows)
```

The temp location is not always obvious but these are sensible places to look (where * can vary depending on username):

- `/var/folders/*/ */*` (OSX, local GUI login shell)
- `/var/tmp/` (OSX (remote ssh login shell), Unix)
- `/tmp/` (Linux)
- `C:\Documents and Settings\<username>\Local Settings\Temp` (Windows/Cygwin)
- `C:\Windows\Temp` (Windows)

To clean up, you can just remove the whole `par-<hex_encoded_username> directory/folder` and then run the current binary again. You can see the active cache by running biber with the `--cache` option which will print the current cache location and exit.

4.2 Binary Architectures

Binaries are available for many architectures, directly on SourceForge and also via T_EXLive:

- `linux_x86_32`
- `linux_x86_64`
- `MSWin32`
- `cygwin32`
- `darwin_x86_64`
- `darwin_x86_i386`
- `freebsd_x86`¹⁸
- `freebsd_amd64`¹⁸
- `solaris_x86`¹⁸

If you want to run development versions, they are usually only regularly updated for the core architectures which are not flagged as third-party built above. If you want to regularly run the latest development version, you should probably git clone the relevant branch and run Biber as a pure Perl program directly.

4.3 Installing

These instructions only apply to manually downloaded binaries. If Biber came with your T_EX distribution just use it as normal.

¹⁸Binary maintained by third party. See README in binary download directory for this platform for support/contact details. Usually, the binary maintainer is also the binary build provider for T_EXLive.

Download the binary appropriate to you OS/arch¹⁹. Below I assume it's on your desktop.

You have to move the binary to somewhere in you command-line or T_EX utility path so that it can be found. If you know how to do this, just ignore the rest of this section which contains some instructions for users who are not sure about this.

4.3.1 OSX

If you are using the T_EXLive MacT_EX distribution:

```
sudo mv ~/Desktop/biber /usr/texbin/  
sudo chmod +x /usr/texbin/biber
```

If you are using the MacPorts T_EXLive distribution:

```
sudo mv ~/Desktop/biber /opt/local/bin/  
sudo chmod +x /opt/local/bin/biber
```

The 'sudo' commands will prompt you for your password.

4.3.2 Windows

The easiest way is to just move the executable into your C:\Windows directory since that is always in your path. A more elegant is to put it somewhere in your T_EX distribution that is already in your path. For example if you are using MiK_TE_X:

```
C:\Program Files\MiKTeX 2.9\miktex\bin\
```

4.3.3 Unix/Linux

```
sudo mv ~/Desktop/biber /usr/local/bin/biber  
sudo chmod +x /usr/local/bin/biber
```

Make sure /usr/local/bin is in your PATH. Search Google for 'set PATH linux' if unsure about this. There are many pages about this, for example: <http://www.cyberciti.biz/faq/unix-linux-adding-path/>

¹⁹<https://sourceforge.net/projects/biblatex-biber>

4.4 Building

Instructions for those who want/need to build an executable from the Perl version. For this, you will need to have Perl 5.14+ with the following modules:

- All Biber pre-requisites
- `PAR::Packer` and all dependencies

You should have the latest CPAN versions of all required modules as Biber is very specific in some cases about module versions and depends on recent fixes in many cases. You can see if you have the Biber Perl dependencies by the usual

```
perl ./Build.PL
```

invocation in the Biber Perl distribution tree directory. Normally, the build procedure for the binaries is as follows²⁰:

- Get the Biber source tree from SF and put it on the architecture you are building for
- `cd` to the root of the source tree
- `perl Build.PL` (this will check your module dependencies)
- `Build test`
- `Build install` (may need to run this as `sudo` on Unix-like systems)
- `cd dist/<arch>`
- `build.sh` (`build.bat` on Windows)

This leaves a binary called `'biber-<arch>'` (also with a `'.exe'` extension on Windows/Cygwin) in your current directory. The tricky part is constructing the information for the build script. There are two things that need to be configured, both of which are required by the `PAR::Packer` module:

1. A list of modules/libraries to include in the binary which are not automatically detected by the `PAR::Packer` dependency scanner
2. A list of extra files to include in the binary which are not automatically detected by the `PAR::Packer` dependency scanner

To build Biber for a new architecture you need to define these two things as part of constructing new build scripts:

- Make a new sub-folder in the `dist` directory named after the architecture you are building for. This name is arbitrary but should be fairly obvious like `'solaris-sparc-64'`, for example.

²⁰On Unix-like systems, you may need to specify a full path to the scripts e.g. `./Build`

- Copy the `biber.files` file from an existing build architecture into this directory.
- For all of the files with absolute pathnames in there (that is, ones we are not pulling from the Biber tree itself), locate these files in your Perl installation tree and put the correct path in the file.
- Copy the build script from a vaguely similar architecture (i.e. Windows/non-Windows ...) to your new architecture directory.
- Change the `--link` options to point to where the required libraries reside on your system.
- Change the `--output` option to name the resulting binary for your architecture.
- Run the build script

The `--link` options can be a little tricky sometimes. It is usually best to build without them once and then run `ldd` (or OS equivalent) on the binary to see which version/location of a library you should link to. You can also try just running the binary and it should complain about missing libraries and where it expected to find them. Put this path into the `--link` option. The `--module` options are the same for all architectures and do not need to be modified. On architectures which have or can have case-insensitive file systems, you should use the build script from either Windows or OSX as a reference as these include a step to copy the main Biber script to a new name before packing the binary. This is required as otherwise a spurious error is reported to the user on first run of the binary due to a name collision when it unpacks itself.

See the PAR wiki page²¹ for FAQs and help on building with `PAR::Packer`. Take special note of the FAQs on including libraries with the packed binary²².

4.4.1 Testing a binary build

You can test a binary that you have created by copying it to a machine which preferably doesn't have `perl` at all on it. Running the binary with no arguments will unpack it in the background and display the help. To really test it without having `LATEX` available, get the two quick test files from SourceForge²³, put them in a directory and run Biber in that directory like this:

```
biber --validate_control --convert_control test
```

²¹http://par.perl.org/wiki/Main_Page

²²<http://par.perl.org/wiki/FAQ>, section entitled 'My PAR executable needs some dynamic libraries'

²³<https://sourceforge.net/projects/biblatex-biber/files/biblatex-biber/testfiles>

This will run Biber normally on the test files plus it will also perform an XSLT transform on the `.bcf` and leave an HTML representation of it in the same directory thus testing the links to the XML and XSLT libraries as well as the BibTeX parsing libraries. The output should look something like this (may be differences of Biber version and locale of course but there should be no errors or warnings).

```
INFO - This is Biber 1.0
INFO - Logfile is 'test.blg'
INFO - BibLaTeX control file 'test.bcf' validates
INFO - Converted BibLaTeX control file 'test.bcf' to 'test.bcf.html'
INFO - Reading 'test.bcf'
INFO - Found 1 citekeys in bib section 0
INFO - Processing bib section 0
INFO - Looking for BibTeX format file 'test.bib' for section 0
INFO - Found BibTeX data file 'test.bib'
INFO - Decoding LaTeX character macros into UTF-8
INFO - Sorting list 'MAIN' keys
INFO - No sort tailoring available for locale 'en_GB.UTF-8'
INFO - Sorting list 'SHORTHANDS' keys
INFO - No sort tailoring available for locale 'en_GB.UTF-8'
INFO - Writing 'test.bbl' with encoding 'UTF-8'
INFO - Output to test.bbl
```

There should now be these new files in the directory:

```
test.bcf.html
test.blg
test.bbl
```